


过渡接头 ADAPTER

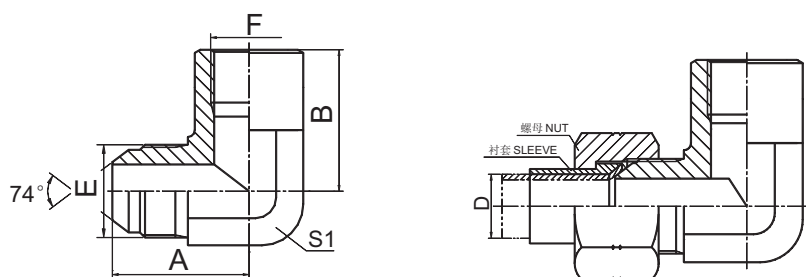

5JB9

90° JIC 外螺纹 74° 外锥 / 英管内螺纹
 90° JIC MALE 74° CONE/BSP FEMALE

代 号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS						
	E	F			A	B		S1	
5JB9-04	7/16"X20	G1/4"X19			32.5	22		19	
5JB9-05-04	1/2"X20	G1/4"X19			30.9	22		19	
5JB9-06	9/16"X18	G3/8"X19			32	26		24	
5JB9-06-04	9/16"X18	G1/4"X19			28.5	22		19	
5JB9-06-08	9/16"X18	G1/2"X14			39	31		30	
5JB9-08	3/4"X16	G1/2"X14			39.5	31		30	
5JB9-08-04	3/4"X16	G1/4"X19			36	22		24	
5JB9-08-06	3/4"X16	G3/8"X19			36	26		24	
5JB9-10-08	7/8"X14	G1/2"X14			43	31		30	
5JB9-10-12	7/8"X14	G3/4"X14			45	37		33	
5JB9-12	1.1/16"X12	G3/4"X14			48	37		33	
5JB9-12-08	1.1/16"X12	G1/2"X14			46	31		30	
5JB9-16	1.5/16"X12	G"X11			53.5	43		41	
5JB9-16-12	1.5/16"X12	G3/4"X14			49	37		33	

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.